


**PARTS LIST**


- Part 1** Base w/ attached bolts (1)
- Part 2** Caster Wheels (4)
- Part 3** Female/Male Metal Tubes (12)
- Part 4** Washers (4)
- Part 5** Middle Support Shelf (1)
- Part 6** Wire Grid Top Rack (1)
- Part 7** .75" Hex Nuts (4)
- Part 8** Carson Sign (2)
- Part 9** Wire Arm Hangers (4)

\*\*\* 2 WRENCHES INCLUDED\*\*\*


**STEP 2** Thread (4) four Part 3 tubes onto the attached bolts on Part 1.

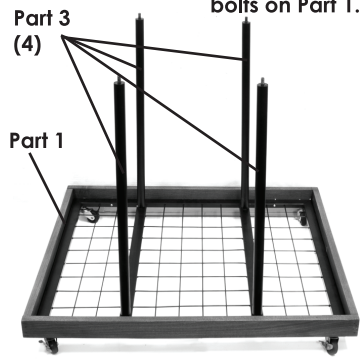


**STEP 3** Thread (4) four more Part 3 tubes onto the male parts of the lower Part 3 tubes.

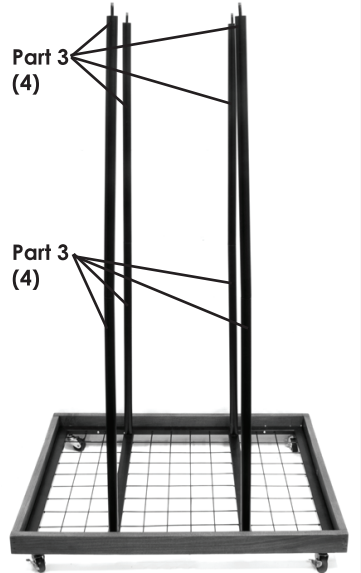

**STEP 4** Place threads of Part 3 tubes through holes of Part 5.

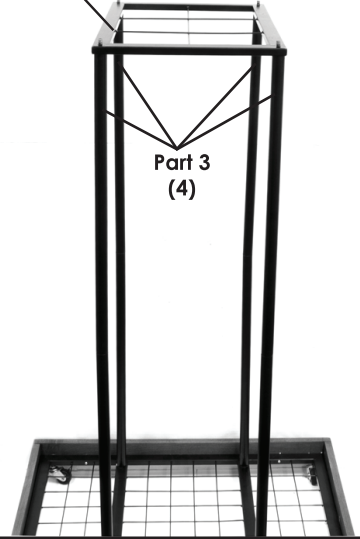


**STEP 5** Thread remaining (4) four Part 3 tubes onto the male parts of all Part 3 tubes that are going through Part 5. For added hanging, slide Part 9 Wire Arm Hangers down Part 3 tubes until they rest on Part 5.

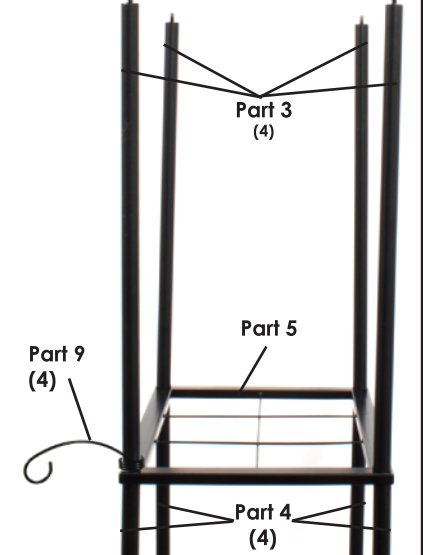


**STEP 1**

Thread Part 2 casters (4) onto the attached bolts on Part 1. \*\*\*Secure with provided wrench \*\*\*

Flip Part 1 over after wheels are secured so wheels rest on ground.

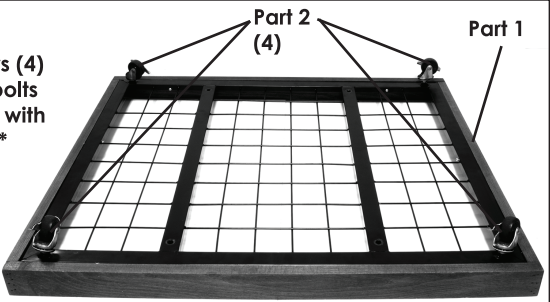


**STEP 6**

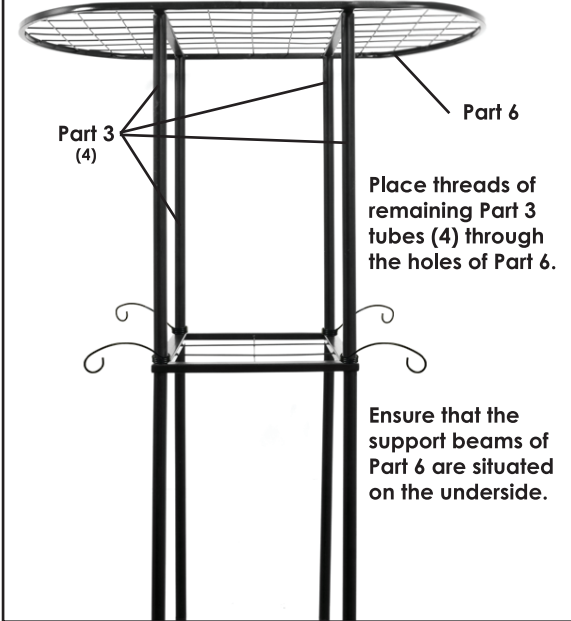

Place threads of remaining Part 3 tubes (4) through the holes of Part 6.

Ensure that the support beams of Part 6 are situated on the underside.


**STEP 7**

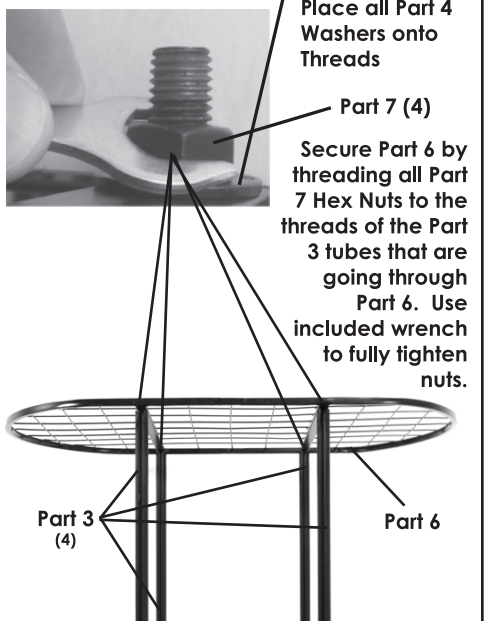

Place all Part 4 Washers onto Threads

Secure Part 6 by threading all Part 7 Hex Nuts to the threads of the Part 3 tubes that are going through Part 6. Use included wrench to fully tighten nuts.

**STEP 8**

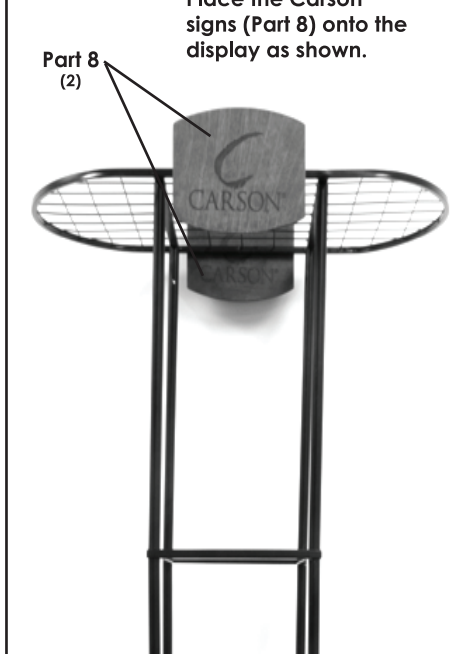

Place the Carson signs (Part 8) onto the display as shown.

**FINAL ASSEMBLY**

